


868 MHZ TEMPERATURE STATION
INSTRUCTIONS MANUAL

INTRODUCTION:


Congratulations on purchasing this innovative 868MHz Temperature Station which displays the time with up to the minute indoor and up to three outdoor temperature readings. To enjoy the full benefits of this innovative product, please read this operating manual.



Temperature Station:

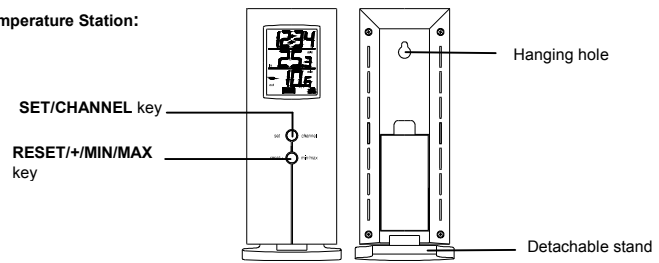

Temperature Transmitter:



- Remote transmission of outdoor temperature to weather station by 868 MHz signal
- Wall mounting case
- Mounting at a sheltered place. Avoid direct rain and sunshine

FEATURES:

- LCD clock in 12 or 24 hour time display
- Indoor and outdoor temperature reading in degree Celsius (°C) or degree Fahrenheit (°F)
- Can receive up to three Outdoor transmitters
- Indoor and outdoor temperature with Minimum and Maximum records
- Wireless transmission at 868 MHz
- Signal reception intervals at 4 seconds
- Table standing or wall mountable (detachable table stand)

SETTING UP:**WHEN ONE TRANSMITTER IS USED**

1. First, insert the batteries in the transmitter (see "**How to install and replace batteries in the Temperature Transmitter**" below).
2. Within 2 minutes of powering up the transmitter, insert the batteries in the Temperature Station (see "**How to install and replace batteries in the Temperature Station**" below). Once the batteries are in place, all segments of the LCD will light up briefly. Following the indoor temperature and the time as 0:00 will be displayed. If these information are not displayed on the LCD after 60 seconds, remove the batteries and wait for at least 60 seconds before reinserting them. Once the indoor data is displayed user may proceed to the next step.
3. After the batteries are inserted, the Temperature Station will start receiving data signal from the transmitter. The outdoor temperature data should then be displayed on the Temperature Station. If this does not happen after 2 minutes, the batteries will need to be removed from both units and reset from step 1.

4. In order to ensure sufficient 868 MHz transmission however, the distance between the Weather Station and the transmitter should not be more than 100 meters (see notes on "**Positioning**" and "**868 MHz Reception**").

Note:

In the event of changing batteries of the units, ensure the batteries do not spring free from the contacts. Always wait at least 1 minute after removing the batteries before reinserting, otherwise start up and transmission problems may occur.

WHEN MORE THAN ONE TRANSMITTER IS USED

1. User shall remove all the batteries from the Weather Station and transmitters, and wait 60 seconds.
2. Insert the batteries in the first transmitter.
3. Within 2 minutes of powering up the first transmitter, insert the batteries in the Temperature Station. Once the batteries are in place, all segments of the LCD will light up briefly. Following the indoor temperature and the time as 0:00 will be displayed. If these information are not displayed on the LCD after 60 seconds, remove the batteries from both units and wait for at least 60 seconds before reinserting them.
4. The outdoor temperature data from the first transmitter (channel 1) should then be displayed on the Temperature Station. Also, the signal reception icon will be displayed. If this does not happen after 2 minutes, the batteries will need to be removed from both units and reset from step 1.
5. Insert the batteries in the second transmitter as soon as the outdoor temperature readings from the first transmitter are displayed on the Temperature Station.
Note: User shall insert the batteries into the second transmitter within 45 seconds after the Temperature Station displays the information of the first transmitter.
6. The outdoor temperature from the second transmitter and the "channel 2" icon should then be

displayed on the Temperature Station. If this does not happen after 2 minutes, the batteries will need to be removed from all the units and reset from step 1.

7. Insert the batteries in the third transmitter as soon as the "channel 2" icon and outdoor data are displayed on the Temperature Station. Then within 2 minutes, the channel 3 outdoor data from the third transmitter will be displayed and the channel icon will shift back to "1" once the third transmitter is successfully received. If this is not happen, user shall restart the setting up from step 1.


Note : User shall insert the batteries into the third transmitter within 45 seconds after the Temperature Station displays the information of the first transmitter. Or immediately after reception of the second transmitter is finished.

8. In order to ensure sufficient 868 MHz transmission however, the distance between the Weather Station and the transmitter should not be more than 100 meters (see notes on "**Positioning**" and "**868 MHz Reception**").

IMPORTANT:

Transmission problems will arise if the setting for additional sensors is not followed as described above. Should transmission problems occur, it is necessary to remove the batteries from all units and start again the set-up from step 1.

HOW TO INSTALL AND REPLACE BATTERIES IN THE TEMPERATURE STATION



The Temperature Station uses 2 x AA, IEC LR6, 1.5V batteries. If the batteries need to be replaced, the low battery symbol will appear on the LCD.

To install and replace the batteries, please follow the steps below:


1. Insert finger or other solid object in the space at the bottom center of the battery compartment and lift up to remove the cover.
2. Insert batteries observing the correct polarity (see marking).

3. Replace compartment cover.

HOW TO INSTALL AND REPLACE BATTERIES IN THE TEMPERATURE TRANSMITTER

The Temperature Transmitter uses 2 x AA, IECLR6, 1.5V batteries. To install and replace the batteries, please follow the steps below:

1. Slide the battery cover downwards and remove.
2. Insert the batteries, observing the correct polarity (see marking).
3. Replace the battery cover.



Note:

In the event of changing batteries in any of the units, all units need to be reset by following the setting up procedures. This is because a random security code is assigned by the transmitter at start-up and this code must be received and stored by the Temperature Station in the first three minutes of power being supplied to it.

BATTERY CHANGE:

It is recommended to replace the batteries in all units on an annual basis to ensure optimum accuracy of these units.




Please participate in the preservation of the environment. Return used batteries to an authorized depot.

LCD SCREEN

The Temperature Station's LCD is comprised of three lines and once the batteries are inserted, all the segments will light up momentarily before displaying:

1. Time “_ : _”
2. Indoor and outdoor temperature in degree Celsius (°C) or Fahrenheit (°F)

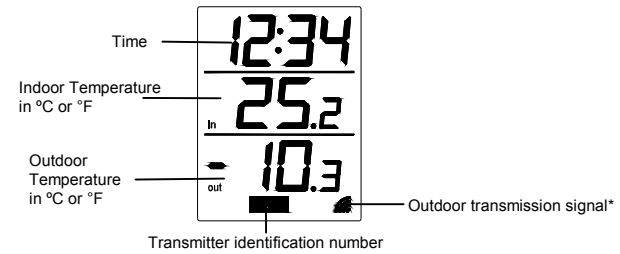

* When the signal is successfully received by the Weather Station, the outdoor transmission icon will be switched on. (If not successful, the icon will not be shown on LCD). The user can then easily see whether the last reception was successful (icon on) or not (icon off). On the other hand, the short blinking of the icon shows that a reception is currently taking place.

12 OR 24 HOUR SETTING:

After the batteries are inserted, set the time display as follow:

1. Press and hold the “SET/CHANNEL” key about 3 seconds to enter the set mode

2. Either a ": 12h" or ": 24h" will appear on the LCD. If ": 12h" is displayed then the current time display is set to 12-hour time. If ": 24h" is displayed then the current time is set to 24-hour time.
3. To alternate between the two times display mode, simply press the "RESET/+MIN/MAX" key.
4. When the desired time display is selected, press the "SET/CHANNEL" key once more to enter the **Time setting** mode.

Note:

When the time display is set as 12-hour mode, the temperature unit will be set to °F; when the time mode is in 24-hour format, the temperature unit will be set to °C.

TIME SETTING:

Following from the 12 or 24 hour setting mode.

1. The Hour digit in the time section starts flashing
2. Using the "RESET/+MIN/MAX" key, enter the hours of the current time and then followed by pressing the "SET/CHANNEL" key to move into the minutes mode
3. Again, using the "RESET/+MIN/MAX" key, enter the minutes of the current time (by holding the key down, the digits are incremented in steps of five) and then finally followed by pressing the "SET/CHANNEL" key to exit the setting mode. Your Temperature Station is now fully operational.

USING THE TEMPERATURE STATION:

INDOOR TEMPERATURE:

The indoor temperature is displayed on the second line of the LCD under the time. The Temperature Station's built in sensor automatically measures the temperature once the batteries are inserted.

MINIMUM AND MAXIMUM INDOOR TEMPERATURE RECORDINGS:

By pressing the "RESET/+MIN/MAX" key the current indoor temperature will alternate between the minimum, maximum and current temperature recordings (also changes for outdoor temperature). Once a new indoor temperature high or low is reached, it will automatically set into the Temperature Station's memory.

OUTDOOR TEMPERATURE READING:

The outdoor temperature reading is on the bottom line of the LCD under the indoor temperature. The Temperature Station receives the outdoor temperature via 868 MHz frequency when the batteries are inserted into the transmitter within the 2 minutes of the setting up time (See **Setting up** above).

Note: Should the outdoor temperature not be received within 2 minutes after inserting the batteries into a transmitter, then see "**Checking 868 MHz reception**" below.

MINIMUM AND MAXIMUM OUTDOOR TEMPERATURE READING:

By pressing the "RESET/+MIN/MAX" key the current indoor and outdoor temperature will alternate between the minimum, maximum and current temperature recordings. Once a new outdoor temperature high or is low reached, it will automatically be set into the Temperature Station's memory.

RESETTING THE MINIMUM AND MAXIMUM TEMPERATURE RECORDING:

By pressing and holding down the "RESET/+MIN/MAX" key for about 3 seconds, both the indoor and outdoor minimum and maximum temperature recordings will be reset to the current indoor and outdoor

temperatures. Only the outdoor temperature display on the LCD will be reset. To reset an outdoor temperature moves to the desired transmitter no.

OUTDOOR TEMPERATURE 1, 2, AND 3

If the more than one transmitter is being used, to alternate between the temperature readings of transmitter 1, 2, and 3, simply press the "SET/CHANNEL" key. If the reading is from transmitter 1, then the identification numbers 1 will be displayed in the outdoor temperature section of the LCD. The same will apply to the next transmitter and so on. However, if only one transmitter is used, no identification number will be displayed on the LCD.

CHECKING FOR 868 MHz RECEPTION:

In normal surroundings (for example away from interfering sources such as TV sets), the outdoor temperature can usually be easily received within 2 minutes. If the outdoor temperature is not displayed on the LCD after 2 minutes, then check the following:

1. The distance of the units should be at least 1.5 - 2.0 meters away from interfering sources such as computer monitors or TV sets.
2. Avoid placing the units onto or in the immediate proximity of metal doors, window frames or structures.
3. Using other electrical products such as headphones and speakers that operate on the same signal (868 MHz) can prevent the transmission pick up.
4. Neighbours using electrical products operating on the 868 MHz signal can also cause interference. In most severe cases, the reception is only possible once all other electrical products using the 868 MHz are switched off.
5. Within thick concrete rooms such as basements and tower blocks, the 868 MHz signal can be weakened (avoid placing near metal frames and structures).

6. Transmission can be affected by exposure to extreme temperature conditions. For example, if the weather has been extremely cold (under -25°C) for an extended period of time then the transmission signal may be weakened. (Please bears this in mind when positioning the transmitter).


Note: Should after checking the above list and the outdoor temperature is still not received, then reset the units (see **Resetting the Temperature Station** below).

RESETTING THE TEMPERATURE STATION:

1. Remove the batteries from the Temperature Station and the transmitter(s)
2. Wait at least 30 seconds and repeat the procedures specified in Setting up above.

POSITIONING

TEMPERATURE STATION:





The Temperature Station comes complete with a detachable stand that gives the option of table standing or wall mounting. To wall mount:

1. Fix a screw into the desired wall, leaving the head extended out the by about 5mm.
2. Using the Temperature Station's hanging hole, carefully hang it onto the screw.

Note: Always ensures that the unit locks onto the screw head before releasing.

OUTDOOR TRANSMITTER:

The sensor is supplied with a holder that may be attached to a wall with the two screws supplied. The sensor can also be position on a flat surface by securing the stand to the bottom to the transmitter.



To wall mount:

1. Secure the bracket onto a desired wall using the screws and plastic anchors.
2. Clip the sensor onto the bracket.

Note:

Before permanently fixing the transmitter wall base, place all units in the desired locations to check that the outdoor temperature readings are receivable. In event that the signal is not received, relocate the transmitter(s) or move them slightly as this may help the signal reception.

The mounting surface can, however, affect the transmission range. If for example the unit is attached to a piece of metal, it may then either reduce or increase the transmitting range. For this reason, we recommend not placing the unit on any metal surfaces or in any position where a large metal or highly polished surface is in the immediate proximity (garage doors, double glazing, etc.). Before securing in place, please ensure that the Weather station can receive the 868MHz signal from the Temperature transmitter at the positions that you wish to situate them.

The Temperature Transmitter simply clicks in or out of the holder. When inserting or removing the Temperature Transmitter from the wall holder please hold both units securely.

CARE AND MAINTENANCE:

- Avoid placing the units in areas prone to vibration and shock as these may cause damage.
- Avoid areas where the units can be exposed to sudden changes in temperature, i.e. direct sunlight, extreme cold and wet/moist conditions as these will lead to rapid changes in temperature which reduces the accuracy of readings.
- When cleaning the LCD and casing, use a soft damp cloth only. Do not use solvents or scouring agents.
- Do not submerge the units into water.
- Immediately remove all low powered batteries to avoid leakage and damage. Replace only with new batteries of the recommended size.
- Do not make any repairs to the units. Please return them to the original point of purchase for repair by a qualified engineer. Opening and tampering with the units may invalidate its guarantee.

SPECIFICATIONS:

Temperature measuring range

Indoor	:	-9.9°C to +59.9°C with 0.1°C resolution 14.2°F to 139.8°F with 0.2°F resolution ("---" displayed if outside this range)
Outdoor	:	-39.9°C to +59.9°C with 0.1°C resolution -39.8°F to +139.8°F with 0.2°F resolution ("---" displayed if outside this range)

Interior data checking intervals : Every 15 seconds
Indoor Temperature : Every 15 seconds
Outdoor temperature data checking interval: Every 4 seconds (or every 15 minutes if data are lost and display "--.-")
Transmission range : up to 100 meters (open space)
Power consumption :
Temperature Station : 2 x AA, IEC LR6, 1.5V batteries
Transmitter : 2 x AA, IEC LR6 1.5V batteries
Battery life for both units : Approximately 24 months (Alkaline batteries recommended)
Dimensions (L x W x H):
Temperature Station : 60 x 31 x 157 mm (table stand excluded)
Transmitter : 38.2 x 21.2 x 128.3 mm (wall bracket excluded)

LIABILITY DISCLAIMER

- The electrical and electronic wastes contain hazardous substances. Disposal of electronic waste in wild country and/or in unauthorized grounds strongly damages the environment
- Please contact your local or/and regional authorities to retrieve the addresses of legal dumping grounds with selective collection
- All electronic instruments must from now on be recycled. User shall take an active part in the reuse, recycling and recovery of the electrical and electronic waste.
- The unrestricted disposal of electronic waste may do harm on public health and the quality of environment.
- This product must however not be thrown in general rubbish collection points.
- As stated on the gift box and labeled on the product, reading the "User manual" is highly recommended for the benefit of the user.

- The manufacturer and supplier cannot accept any responsibility for any incorrect readings and any consequences that occur should an inaccurate reading take place.
- This product is not to be used for medical purposes or for public information.
- The specifications of this product may change without prior notice.
- This product is not a toy. Keep out of the reach of children.
- No part of this manual may be reproduced without written consent of the manufacturer.



R&TTE Directive 1999/5/EC

Summary of the Declaration of Conformity : We hereby declare that this wireless transmission device does comply with the essential requirements of R&TTE Directive 1999/5/EC.